


Gwint zewnętrzny  
metryczny, cylindryczny  
z uszczelką miękką ( NBR, Viton) - WD  
lub uszczelnieniem czołowym - DKA

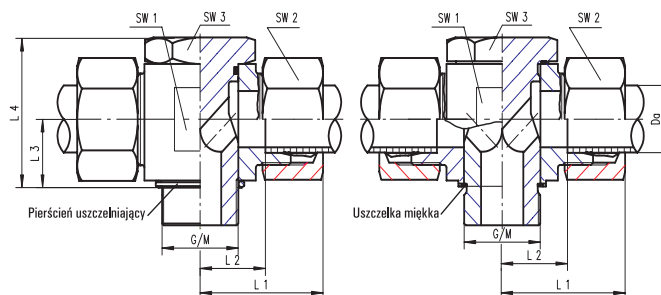

Seria	PN bar	Rura		SW 2	SW 3	SW 1	L 2	L 1	L 4	L 3	Kod	kg/100
		śr. zewn Da	M									
L	315	6	M 10x1	14	17	17	12,0	27	24,0	10,5	TH 6-LM	0,81
		8	M 12x1,5	17	19	22	14,5	29	30,0	14,0	TH 8-LM	1,38
		10	M 14x1,5	19	19	22	15,5	30	30,0	14,0	TH 10-LM	1,54
		12	M 16x1,5	22	24	27	18,0	33	36,0	16,5	TH 12-LM	2,49
		15	M 18x1,5	27	30	32	21,5	37	39,5	18,5	TH 15-LM	3,50
		18	M 22x1,5	32	30	32	21,0	37	45,0	21,5	TH 18-LM	4,73
	160	22	M 26x1,5	36	36	41	27,5	44	53,0	24,0	TH 22-LM	7,67
		28	M 33x2	41	46	50	32,0	49	66,0	30,5	TH 28-LM	12,70
		35	M 42x2	50	55	60	36,0	58	76,0	35,5	TH 35-LM	20,91
		42	M 48x2	60	60	70	40,5	63	87,0	40,5	TH 42-LM	30,45
S	400	6	M 12x1,5	17	19	22	16,5	31	30,0	14,0	TH 6-SM	1,50
		8	M 14x1,5	19	19	22	16,5	31	30,0	14,0	TH 8-SM	1,68
		10	M 16x1,5	22	24	27	18,5	35	36,0	16,5	TH 10-SM	2,68
		12	M 18x1,5	24	27	27	20,0	36	39,5	18,5	TH 12-SM	3,36
		14	M 20x1,5	27	30	32	22,5	40	43,5	20,0	TH 14-SM	4,54
		16	M 22x1,5	30	30	32	22,0	40	45,0	21,5	TH 16-SM	4,93
		20	M 27x2	36	36	41	26,5	48	53,0	24,0	TH 20-SM	8,57
	250	25	M 33x2	46	46	50	31,5	56	66,0	30,5	TH 25-SM	15,38
		30	M 42x2	50	55	60	37,0	64	76,0	35,5	TH 30-SM	23,20
		38	M 48x2	60	60	70	41,5	72	87,0	40,5	TH 38-SM	34,65